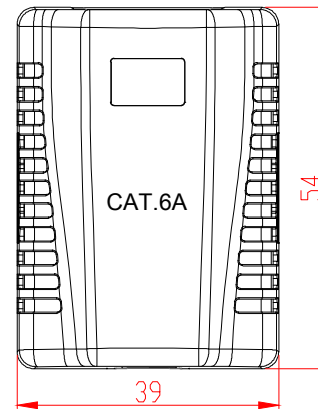
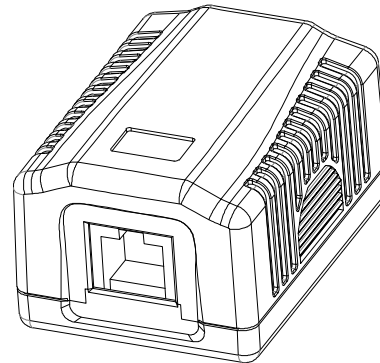


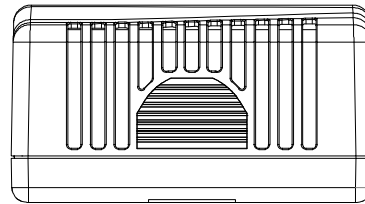



NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

1. PANEL FRAME:ZINC ALLOY
2. MOLDED CASE:ABS ;
3. IDC MATERIAL:PC ,CONTACT:PHOSPHOR BRONZE;
WITH NICKEL PATING ;
4. RJ45 JACK LIFE:750 TIMES MIN;
5. IDC LIFE:200 TIMES MIN;
6. WIRE:AWG 23-26;

													
					Material							Item No.	NCAC-1F6A-01
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	STP Cat6A Surface Box 1port		
Drawn							A4	X:1	mm				
Checked							A4	X:1	mm	ERP			
Approved										Sheet		1 OF 1	Version: A/0