


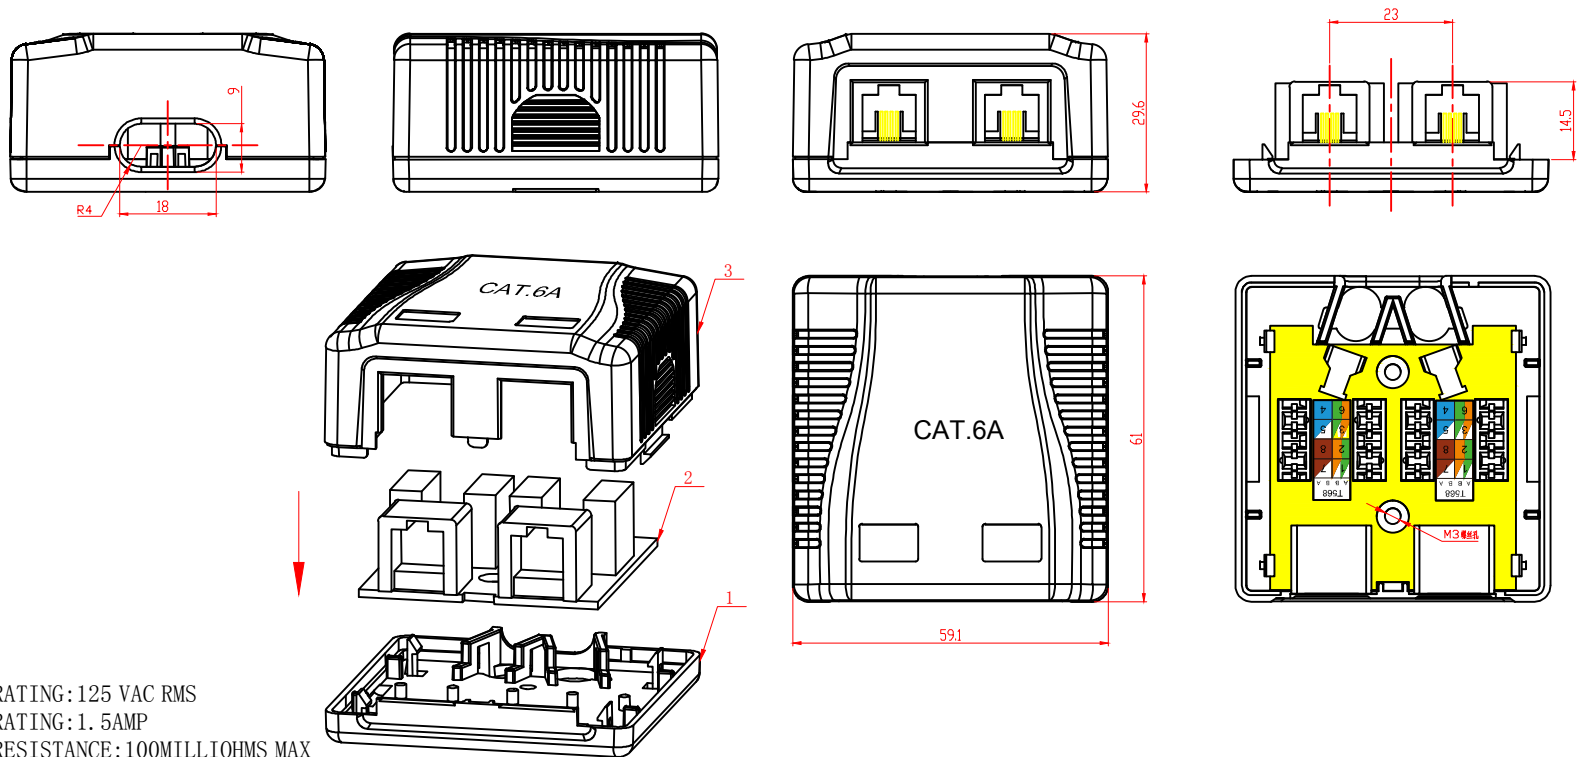

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1. 5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40°TO+85°
2. OPERATION:0°TO70°

MECHANICAL:

1. HOUSING MATERIAL:ABS
2. INSERT MATERIAL:FAME RETARDANCY ABS
3. PCB MATERIAL:FR-4 T=1. 6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0. 30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0. 50mm WITH TIN PLATING
6. RJ45 JACK ; IFE:750 TIMES MIN

					Material			Item No.
					ABS			NCAC-2F6A-01
					Angles Projection			Part Name
					Size Scale Unit			FTP Cat.6A Surface Box 2 Port
					A4 X:1 mm			ERP
					Sheet 1 OF 1 Version: A/0			Part No.
SYM	Number	Bill No. of Alteration	Signature	Date				
Drawn				Tolerance				
Checked				0.00~20.00 ±0.10				
				20.00~50.00 ±0.15				
				50.00~100.00 ±0.20				
Approved				100.00~ Angle ±0.25 ±30'				