




gembird®

**USER MANUAL • HANDBUCH • HANDLEIDING • MANUALE D'USO •
MANUAL DE USUARIO • MANUAL DO USUÁRIO • MANUEL
DESCRIPTIF • INSTRUKCJA OBSŁUGI • UŽIVATELSKÝ MANUÁL •
ІНСТРУКЦІЯ КОРИСТУВАЧА • POUŽÍVATEĽSKÁ PRÍRUČKA •
VARTOTOJO VADOVAS • MANUAL DE UTILIZARE**

TVS-55T-03

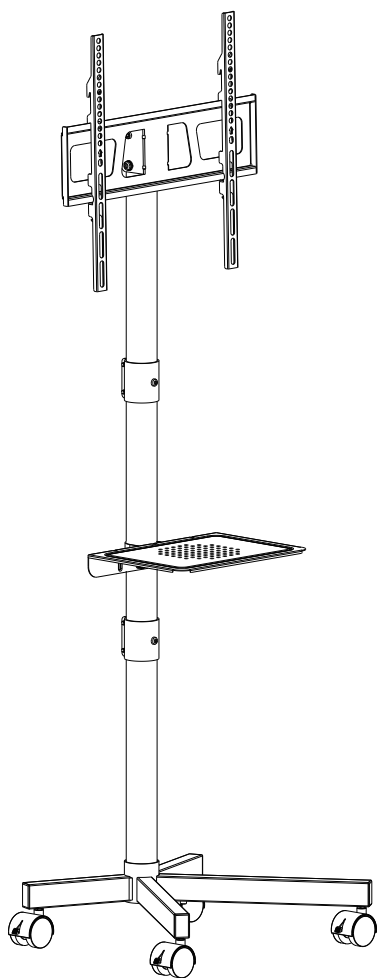

 **400x400
Max.**

 **32" - 55"**

 **Max.
25 kg**

**TV floor stand
with caster wheels (tilt)**

Supplied Parts and Hardware



M-I

washer
φ 4 / φ 6 / φ 8
x4pcs



M-G

Spacer
D8X5
X8PCS



M-H

Spacer
D8X10
X8PCS

M4



M-A

TV Bolt
M4X12
X4PCS



M-B

TV Bolt
M4X30
X4PCS

M6



M-C

TV Bolt
M6X15
X4PCS



M-D

TV Bolt
M6X30
X4PCS

M8



M-E

TV Bolt
M8X20
X4PCS



M-F





TV Bolt
M8X50
X4PCS






Assembly Instructions for Trolley Stand

safety warning: If you do not understand these directions, or have any doubts about the safety of the installation, please call a qualified contractor. Check carefully to make sure there are no missing or defective parts, never use defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. We can not be liable for damage or injury caused by incorrect mounting, incorrect assembly, or incorrect use.



Required Tools: Phillips screw driver.

Supplied Parts


NO.	Picture	Description	Quantiry
1		square tube	2
2		tube connector	1
3		bottom pole	1
4		middle pole	1
5		top pole	1
6		pole connector	2
7		cable tie	3
8		wheel	4

NO.	Picture	Description	Quantity
9		M6X16	8
10		M8X20	1
11		M6X16	1
12		M8X16 D8 iron washer D8 plastic washer	2
13		M6X60	1
14		tool kit	1
15		square plate	1
16		tv arm set	2
17		shelf	1
18		“C” clamp soft pad	1

1-1 Attach the TV Brackets to Your TV

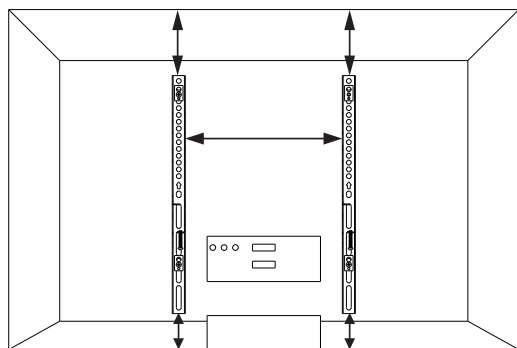


Round holes should be directed toward the top.

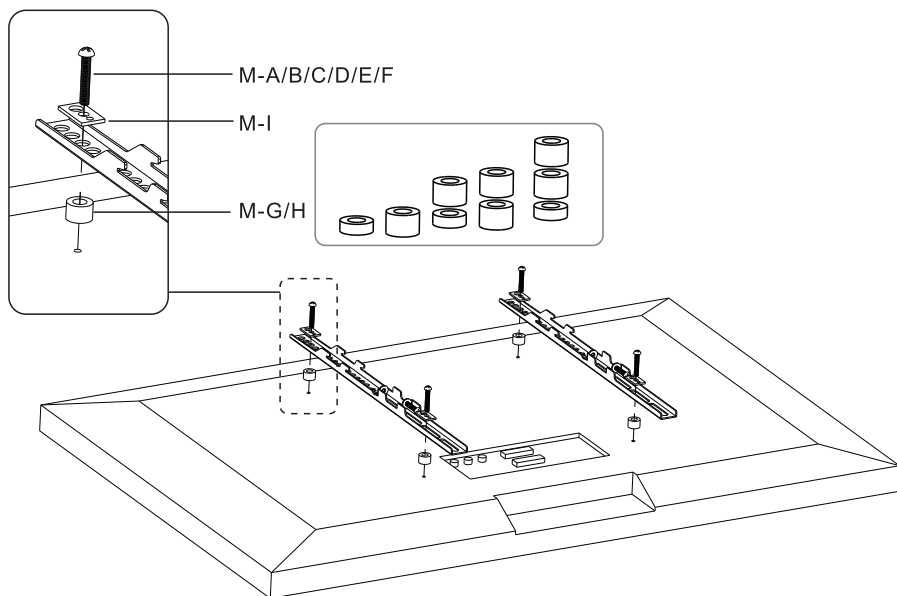


Add spacers if needed to fit the bolt length and TV back.


Step 2 Install the Base

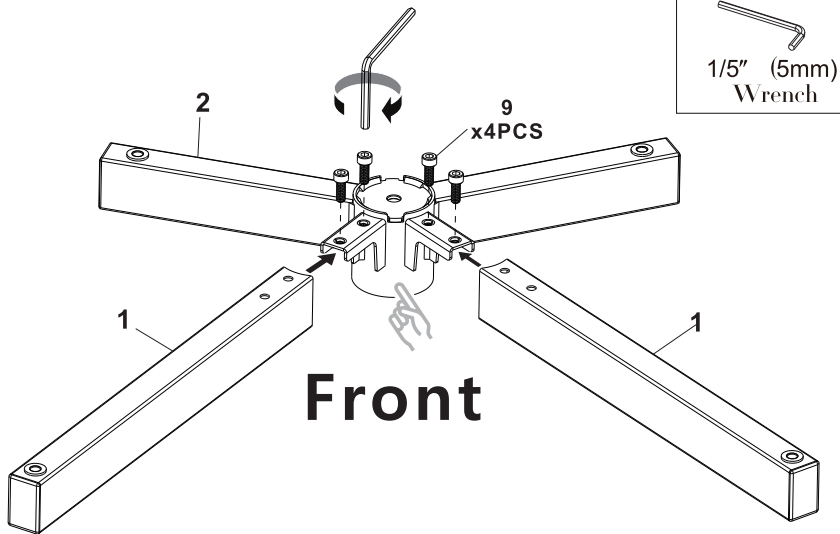

Install the rectangular tubes (1 & 19) on the base (2) by the screws (9) and the wrench, and tighten them.




Brake On



Brake Off

1.install four universal wheels, tighten them


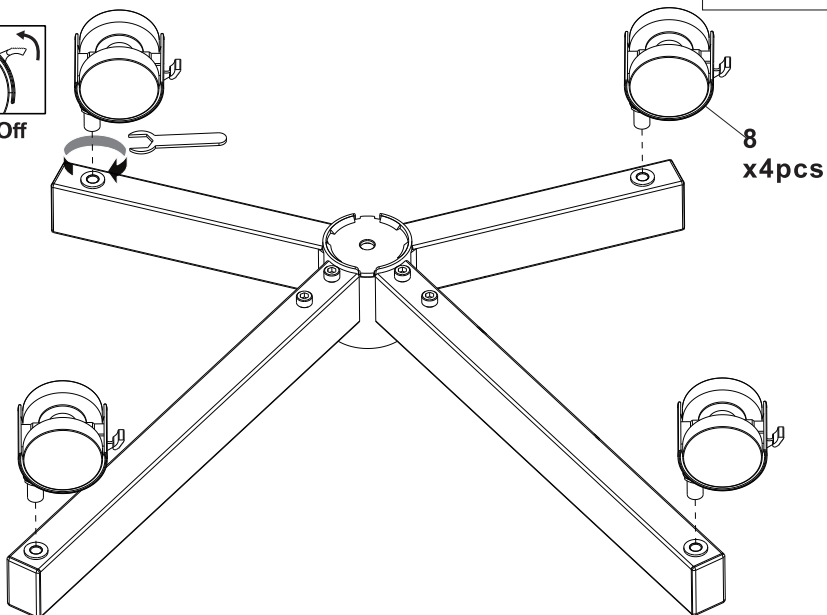


Step 3 Secure the Poles to the Base

3-1



1/5" (5mm)
Wrench

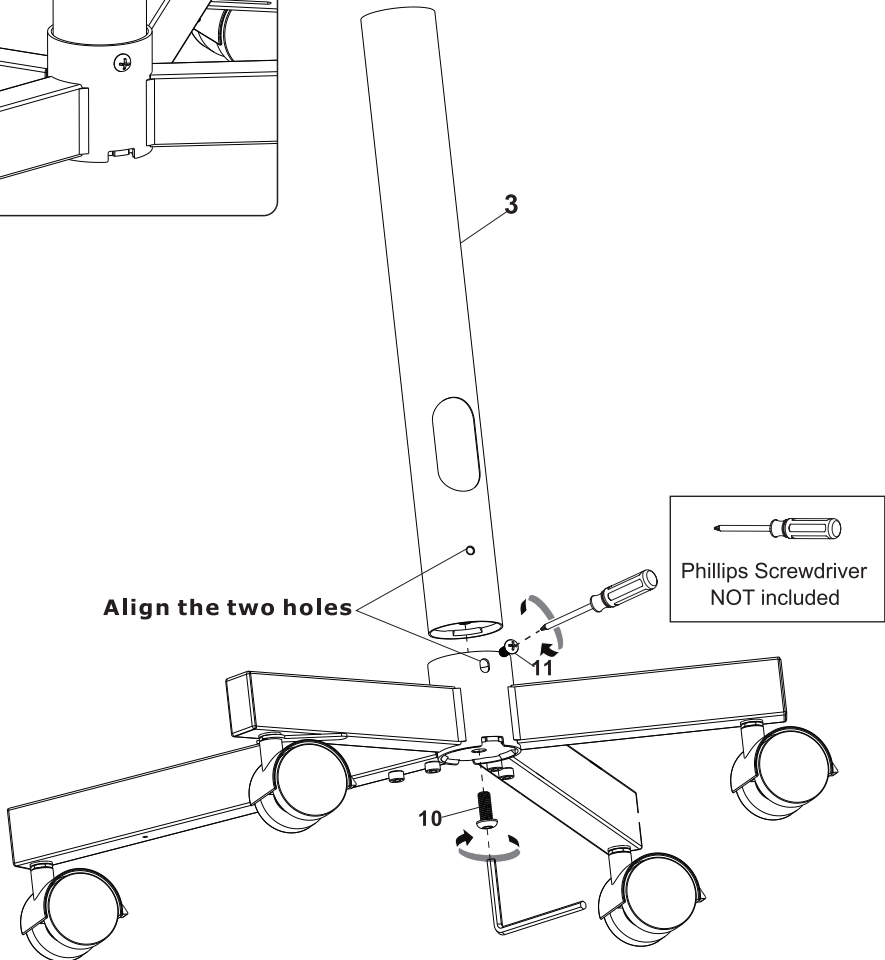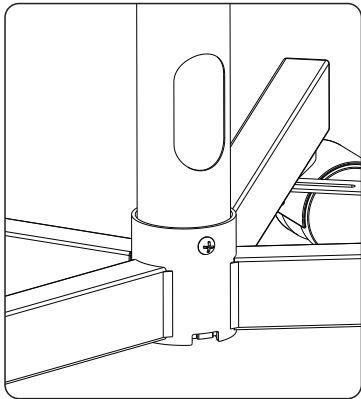


Phillips Screwdriver
NOT included

insert the column into the base, first tighten screw (11) with a screwdriver,
then tighten screw (10) with the wrench

Front

1/5" (5mm)
Wrench

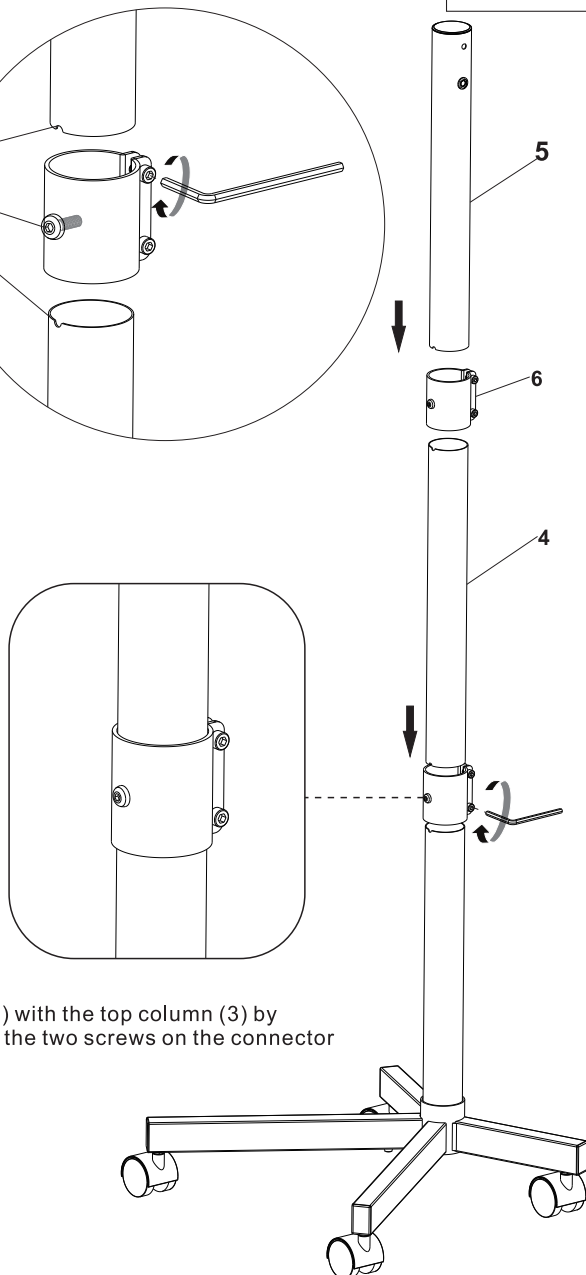


Connect the middle column (4) with the top column (3) by the connector (6), and tighten the two screws on the connector

Step 4 Secure the TV Plate to the Upper Poles


4-1

connect the plate and the top column,
tighten the screws (13 & 12)



1/5" (5mm)
Wrench

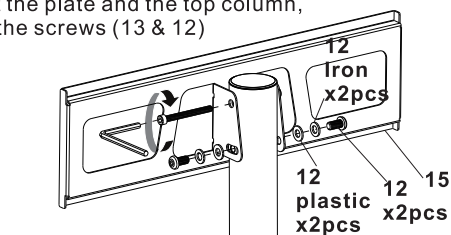


Install the panel shelf:
first stick the EVA protection pad
to the semi-ring connector, then fix
up the shelf on the column by the
connector and tighten the four
screws



stick the EVA protection pad

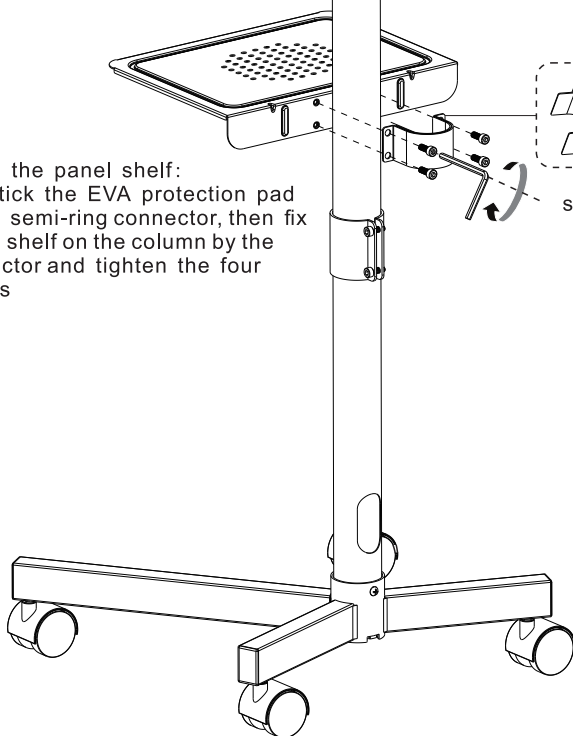

Step 5 Hang the TV on the TV Plate

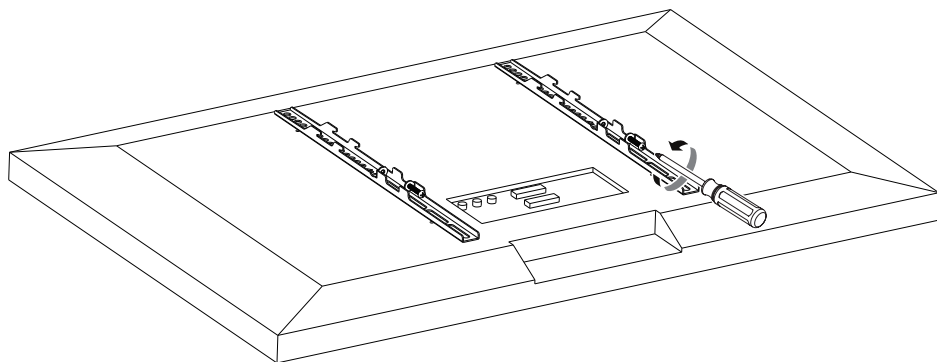


Slightly loosen the preassembled bolts on both TV brackets until they are seated flush with the plate.




HEAVY! You may need assistance with this step.



Phillips Screwdriver
NOT included

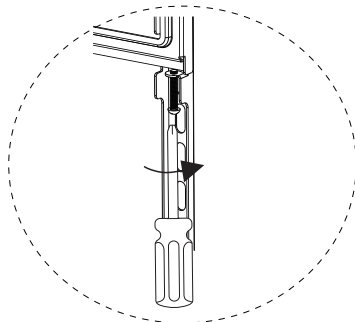


Lock the safety screw




low level

high level

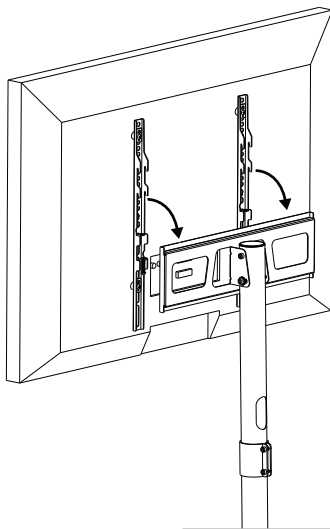


Hang the TV on the TV plate. Retighten the bolts on the brackets until they are pulled firmly against the TV plate.

Step 6 Adjust the Tilt Angle of the TV

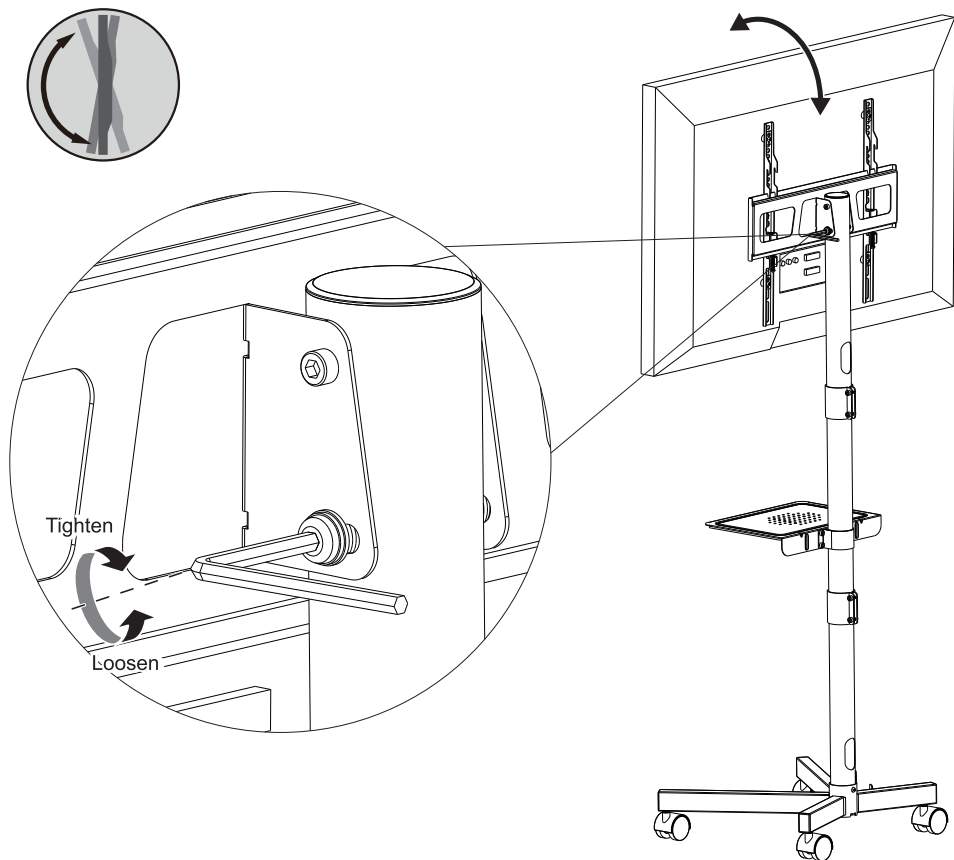


Slightly loosen nuts [T]. Adjust the TV to your desired tilt angle. Retighten nuts [T] to lock the tilt angle.


Step 7 Adjust the Height of the Casters



If the TV cart is not level on the floor, you can adjust the casters by turning the preassembled nuts for proper stability.

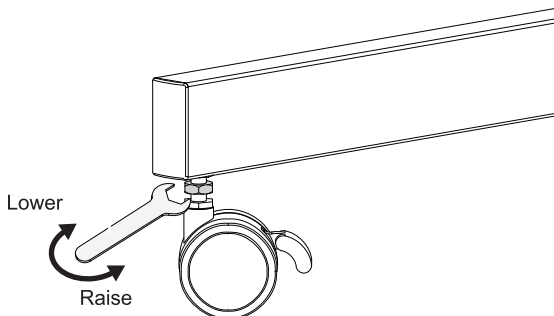

Step 8 Cable Management

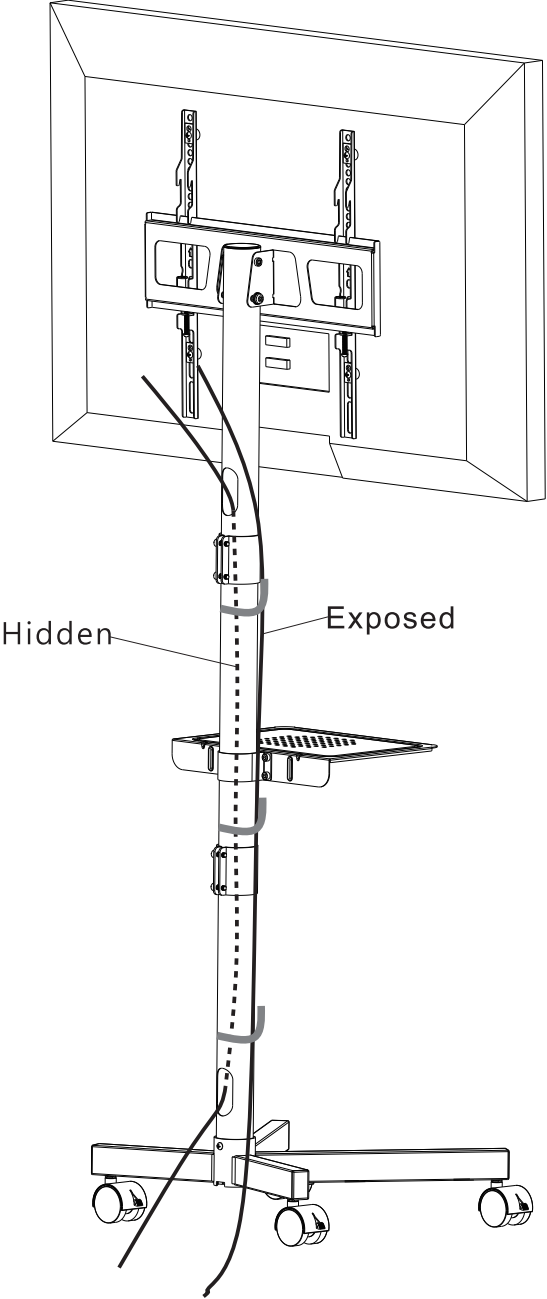

GENERAL INFORMATION

This product has been manufactured by or on behalf of Gembird Europe B.V.. Inquiries to the EU Importer or related to product compliance in Europe should be sent to: Gembird Europe B.V., Wittevrouwen 56, 1358 CD, Almere, The Netherlands. www.gmb.nl

Warranty conditions: www.gmb.nl/warranty

Product support: www.gmb.nl/service and/or helpdesk@gembird.nl

SAFETY

(ENG) To ensure safe handling of the product, follow the safety advice on: **(DE/AT)** Hinweise zum sicheren Gebrauch der Produkte finden Sie auf: **(NL/BE)** Voor een veilig gebruik van het product volgt u deze algemene veiligheidsaanwijzingen op:

(ES) Para garantizar una manipulación segura de los dispositivos, siga las advertencias de seguridad disponibles en: **(CZ)** Abyste zajistili bezpečnou manipulaci s výrobkem, dodržujte bezpečnostní pokyny na: **(FR/BE)** Pour garantir une manipulation sûre des appareils, suivez les consignes de sécurité sur: **(IT)** Per garantire una manipolazione sicura del prodotto, seguire i consigli di sicurezza su: **(PT)** Para garantir o manuseio seguro do produto, siga as recomendações de segurança em: **(PL)** Aby obchodzić się bezpiecznie z produktami, należy przestrzegać wskazówek dotyczących bezpieczeństwa: **(RO)** Pentru asigurarea unei manipulări în condiții de siguranță a produsului, urmați recomandările de securitate de pe: **(SK)** Na zaistenie bezpečnej manipulácie so zariadeniami sa riadte bezpečnostnými pokynmi na: **(SL)** Za zagotavljanje varnega ravnanja z napravami, upoštevajte varnostna navodila, ki jih najdete na: **(HR)** Da biste osigurali sigurno rukovanje uređajima, pratite sigurnosne savjete na web-mjestu: **(HU)** A készülékek biztonságos kezelésének érdekében kövesse a biztonsági tanácsokat **(BG)** За да осигурите безопасна работа на устройствата, следвайте съветите за безопасност по-долу: www.gmb.nl/safety

